



1	Type	Low Distortion Lens	
2	Resolution	4K	
3	Image Format	1/2.7"	
4	Image Circle	φ6.8mm(MAX)	
5	EFL	3.55mm	
6	TTL	15.70mm	
7	F/NO.	2.0	
8	FFL (M)	4.54mm	
9	BFL (O)	4.86mm	
10	For Sensor	1/2.7"	1/2.9"
11	F.O.V	Horizontal	79° 73°
12		Vertical	51° 49°
13		Diagonal	90° 84°
14	TV Distortion	<-1%	
15	Relative Ill.	>65%	
16	Chief Ray Angle	<13°	
17	M.O.D	0.1m~∞	
18	Mount Type	M12*P0.5	
19	Dimension Figure	φ14.00*L11.16mm	
20	Lens Structure	2G3P	
21	IR-Filter	T=50%&IR650±10nm	
22	Waterproof	No	
23	Weight	1.7g	
24	Iris Operation	Fixed	
25	Zoom Operation	Fixed	
26	Focus Operation	Manual	
27	Operating Temperature	-20° ~+85°	
28	Storage Temperature	-20° ~+85°	

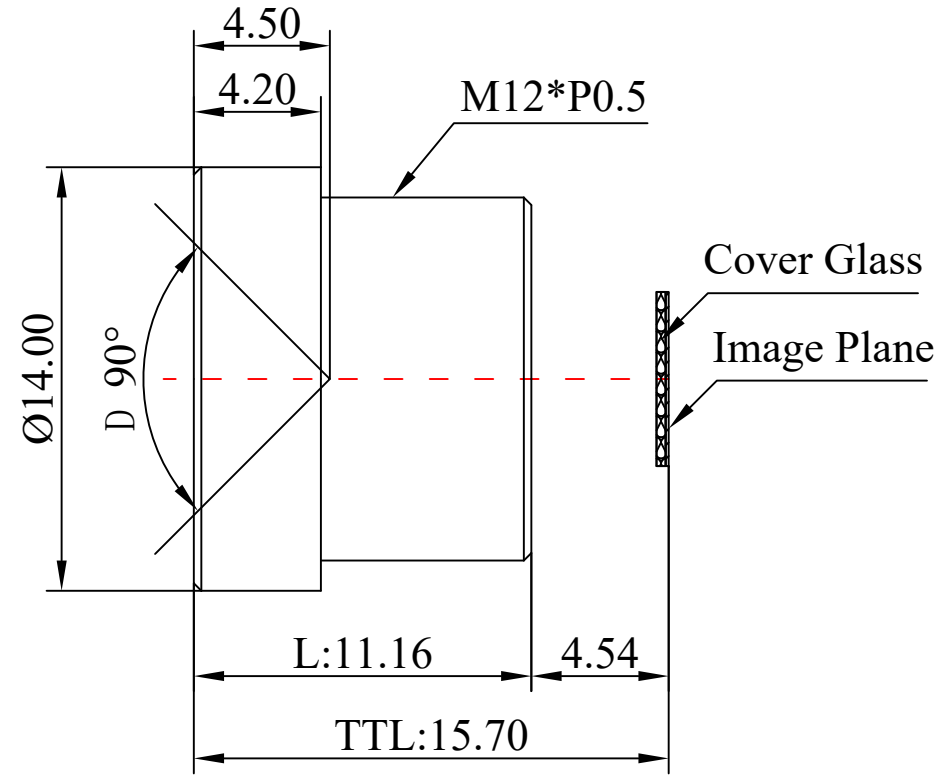

Scale	Remark	Tolerances	Date	Revised	
4:1	X	±0.2	2020-04-24	CH3655A Rev1.0	
	X.0	±0.15			
Units	X.00	±0.10	Design	Linda	2016-05-26
	X.000	±0.001	Checked	Anna	2016-07-20
mm	Angle	±0.5°	Approval	Sanmu	2016-07-20

福州创安光电科技有限公司  
 FUZHOU CHUANGAN OPTICS CO., LTD



3D Angle Projection