
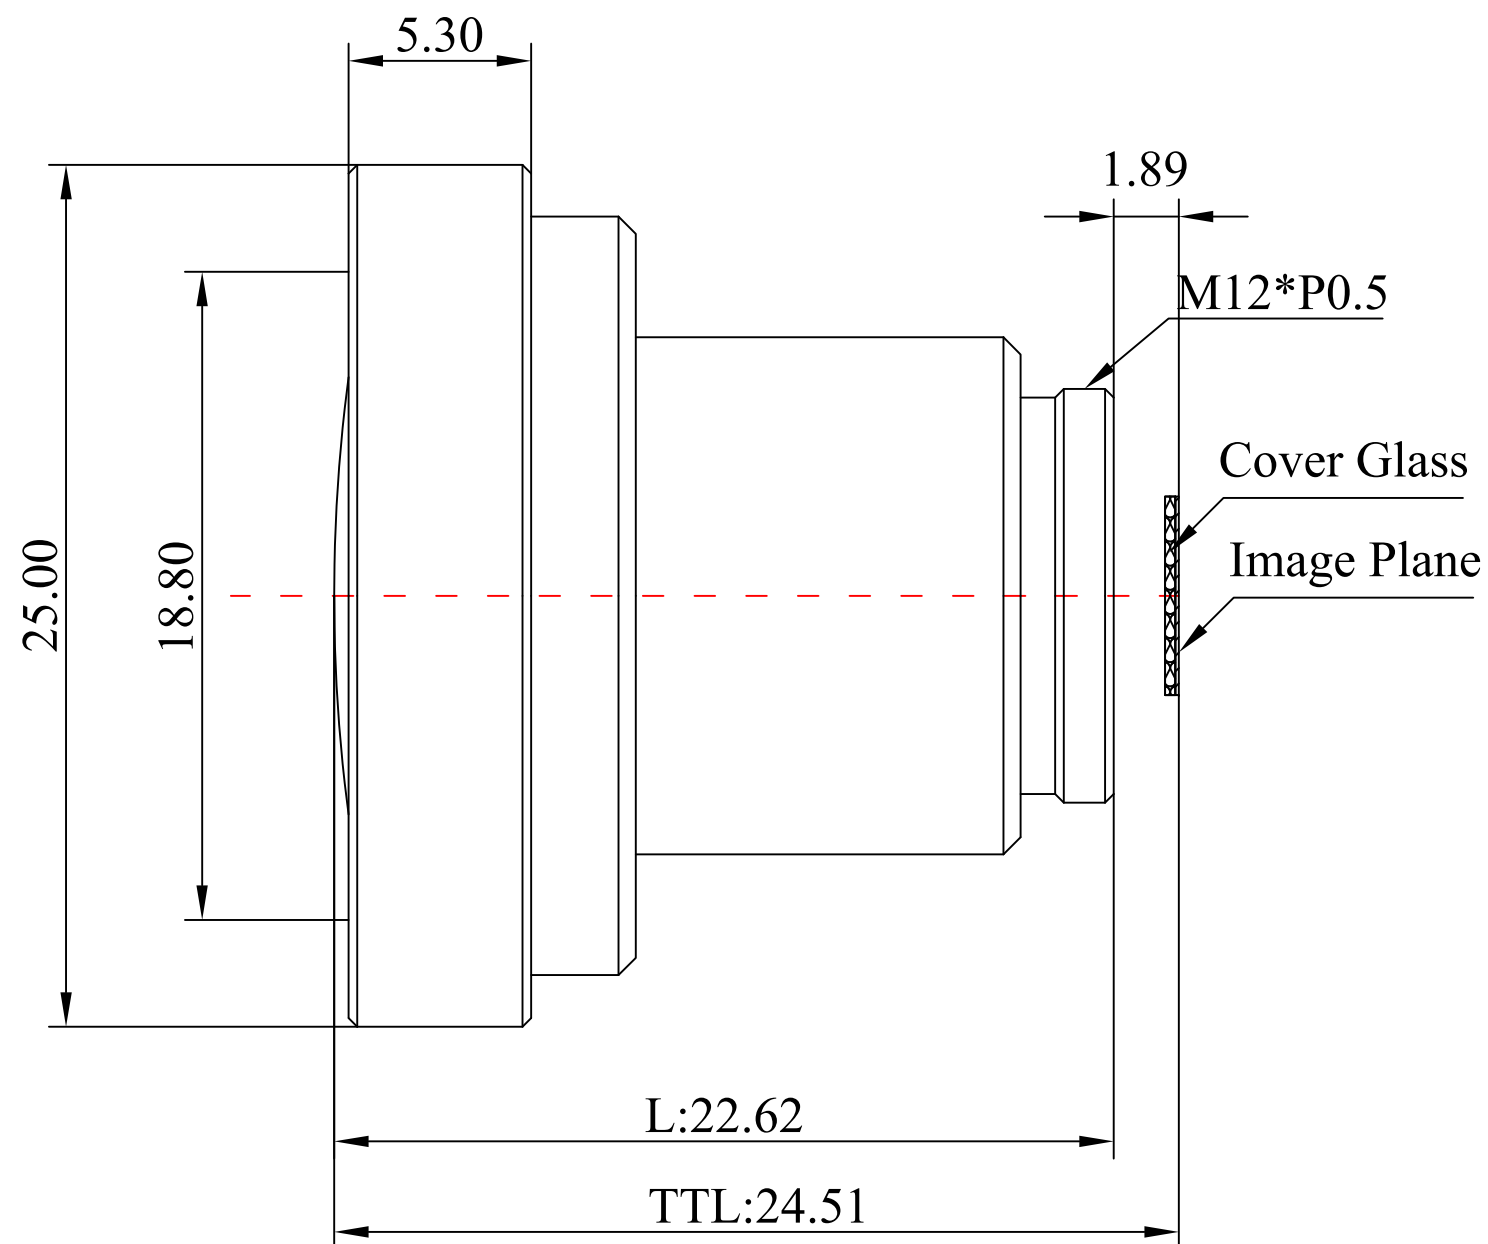


1	Type	TOF Lens			
2	Resolution	MP			
3	Image Format	1/3"			
4	Image Circle	φ6.0mm(MAX)			
5	EFL	2.8mm			
6	TTL	24.51mm			
7	F/NO.	<b>1.2</b>			
8	FFL (M)	1.89mm			
9	BFL (O)	5.19mm			
10	For Sensor	MLX75023	OPT8241	epc635	OPT8320
11	Horizontal	112.4°	112.4°	69.1°	50.7°
12	Vertical	78.9°	78.9°	24.9°	37.6°
13	Diagonal	165.9°	165.9°	74.4°	64.4°
14	TV Distortion	<-32.7%	<-32.7%	<-6.3%	<-4.7%
15	Relative Ill.	>67.9%	>67.9%	>89.8°	>92°
16	C.R.A	<17.2°	<17.2°	<9.8°	<8.7°
17	M.O.D	0.1m~∞			
18	Mount Type	M12*P0.5			
19	Dimension Figure	φ25.00*L22.62mm			
20	Lens Structure	1G2P			
21	IR-Filter	Non-IR			
22	Waterproof	No			
23	Weight	---			
24	Iris Operation	Fixed			
25	Zoom Operation	Fixed			
26	Focus Operation	Manual			
27	Operating Temperature	-20° ~+85°			
28	Storage Temperature	-20° ~+85°			

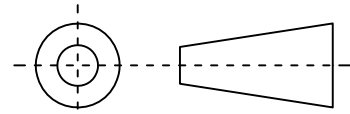

Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2020-05-09	CH3663A Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2016-05-26	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2016-07-20	
mm	Angle	±0.5°	Approval	Sanmu	2016-07-20	