



1	Type	Vari-Focal Lens			
2	Resolution	8MP			
3	Image Format	1"			
4	Image Circle	φ16mm(MAX)			
5	EFL	12~36mm			
6	Flange BFL	17.526mm			
7	F/NO.	F1.6			
8	FFL (M)	17.53mm			
9	BFL (O)	9.80mm			
10	For Sensor	1"	2/3"	1/2"	
11	F.O.V	Horizontal	22.6~67.2°	15.4~38.1°	11.4~27.9°
12		Vertical	16.8~54.6°	11.5~28.7°	8.3~27.9°
13		Diagonal	28.6~37.2°	19.3~47.3°	14~34.7°
14	OPT Distortion	<-4.86%~-8%			
15	Relative Ill.	---			
16	Chief Ray Angle	<4.9°~5.82°			
17	M.O.D	2.5m~∞			
18	Mount Type	C-Mount			
19	Dimension Figure	φ66*L98.07mm			
20	IR-Correction	Yes			
21	Filter Size	---			
22	Waterproof	No			
23	Weight	---			
24	Iris Operation	Auto			
25	Zoom Operation	Manual			
26	Focus Operation	Manual			
27	Operating Temperature	-20° ~+85°			
28	Storage Temperature	-20° ~+85°			

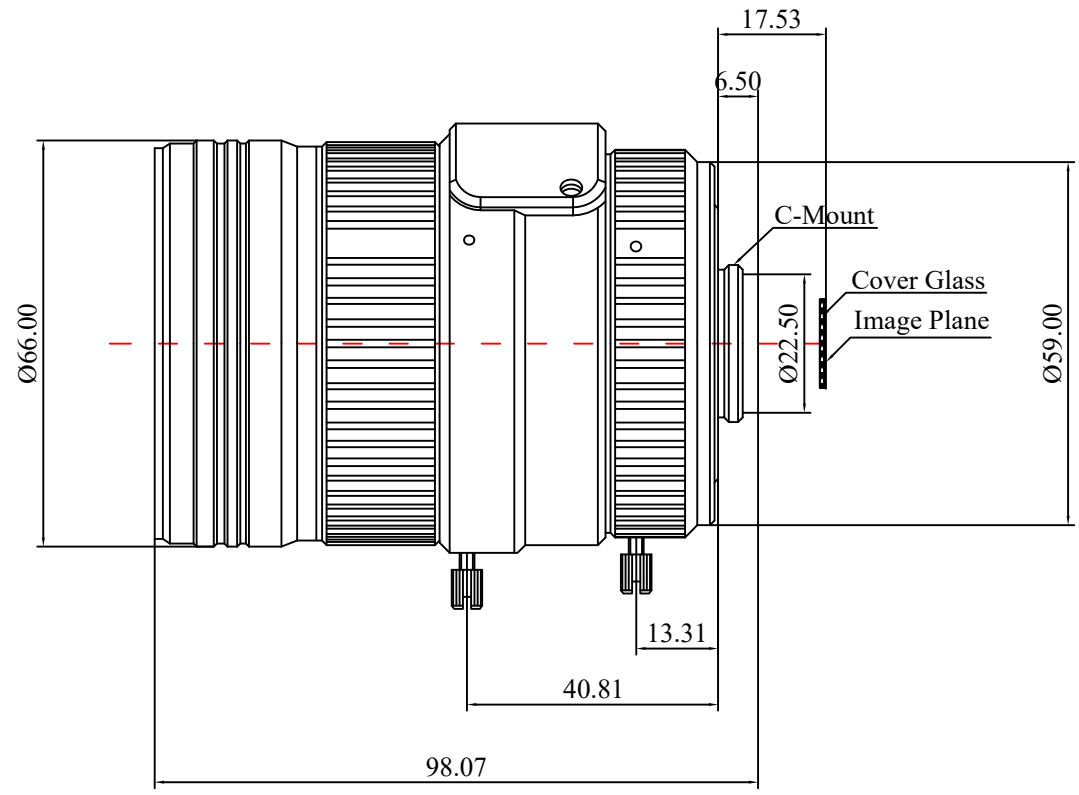

Scale	Remark	Tolerances	Date	Revised	
4:1	X	±0.2	2024-05-09	CH3689B Rev1.0	
Units	X.00	±0.10	Design	Linda	2024-03-13
	X.000	±0.001	Checked	Anna	2024-04-09
mm	Angle	±0.5°	Approval	Sanmu	2024-04-19

福州创安光电科技有限公司  
 FUZHOU CHUANGAN OPTICS CO., LTD



3D Angle Projection