
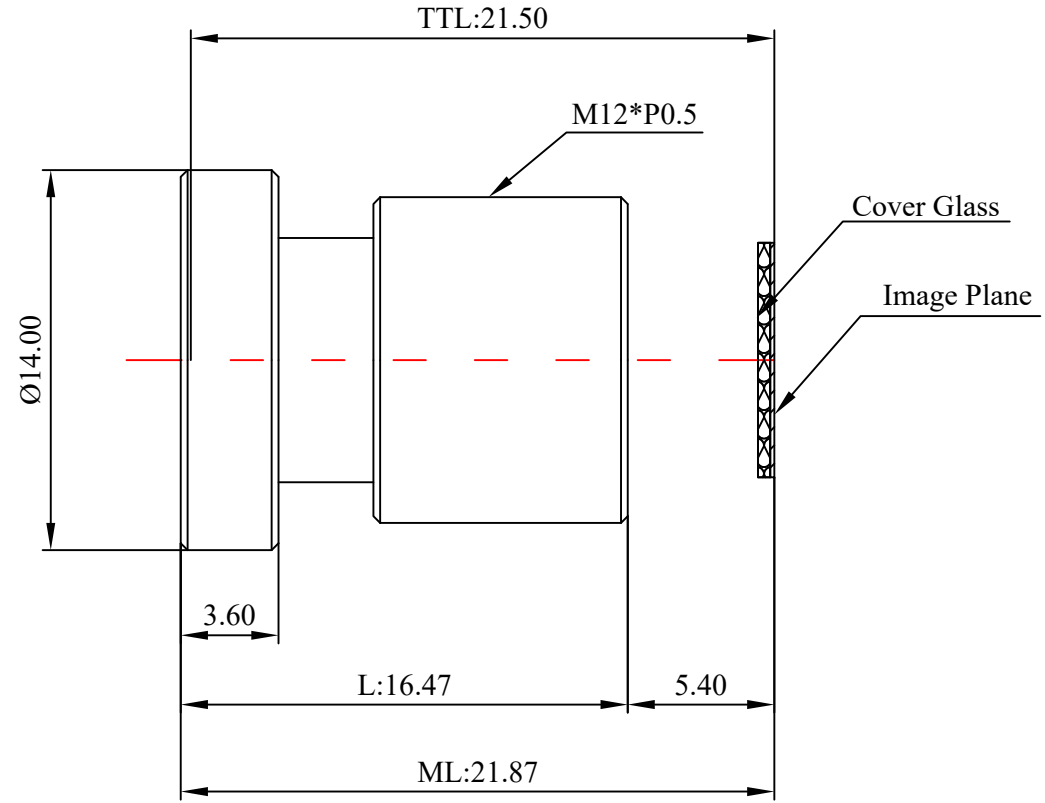


1	Type	Low Distortion Lens			
2	Resolution	16MP			
3	Image Format	1/1.8"			
4	Image Circle	φ9.2mm(MAX)			
5	EFL	8.0mm			
6	TTL	21.50mm			
7	F/NO.	F2.4			
8	FFL (M)	5.40mm			
9	BFL (O)	7.38mm			
10	For Sensor	IMX334	IMX377	IMX307	
11	F.O.V	Horizontal	50.8°	42.0°	38.2°
12		Vertical	29.6°	32°	22.0°
13		Diagonal	58°	51.6°	43.2°
14	OPT Distortion	<-3.0%			
15	Relative Ill.	>60%			
16	Chief Ray Angle	<18°			
17	M.O.D	0.1m~∞			
18	Mount Type	M12*P0.5			
19	Dimension Figure	φ14.0*L16.47mm			
20	Lens Structure	7G			
21	IR-Filter	Non-IR			
22	Waterproof	No			
23	Weight	4.4g			
24	Iris Operation	Fixed			
25	Zoom Operation	Fixed			
26	Focus Operation	Manual			
27	Operating Temperature	-25° ~+85°			
28	Storage Temperature	-25° ~+85°			



Scale	Remark	Tolerances	Date	Revsied		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4: 1	X	±0.2	2024-12-09	CH3772A Rev1.0		
	X.0	±0.15				
Units	X.00	±0.10	Design	Linda	2024-03-03	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2024-03-12	
mm	Angle	±0.05°	Approval	Sanmu	2024-04-03	