
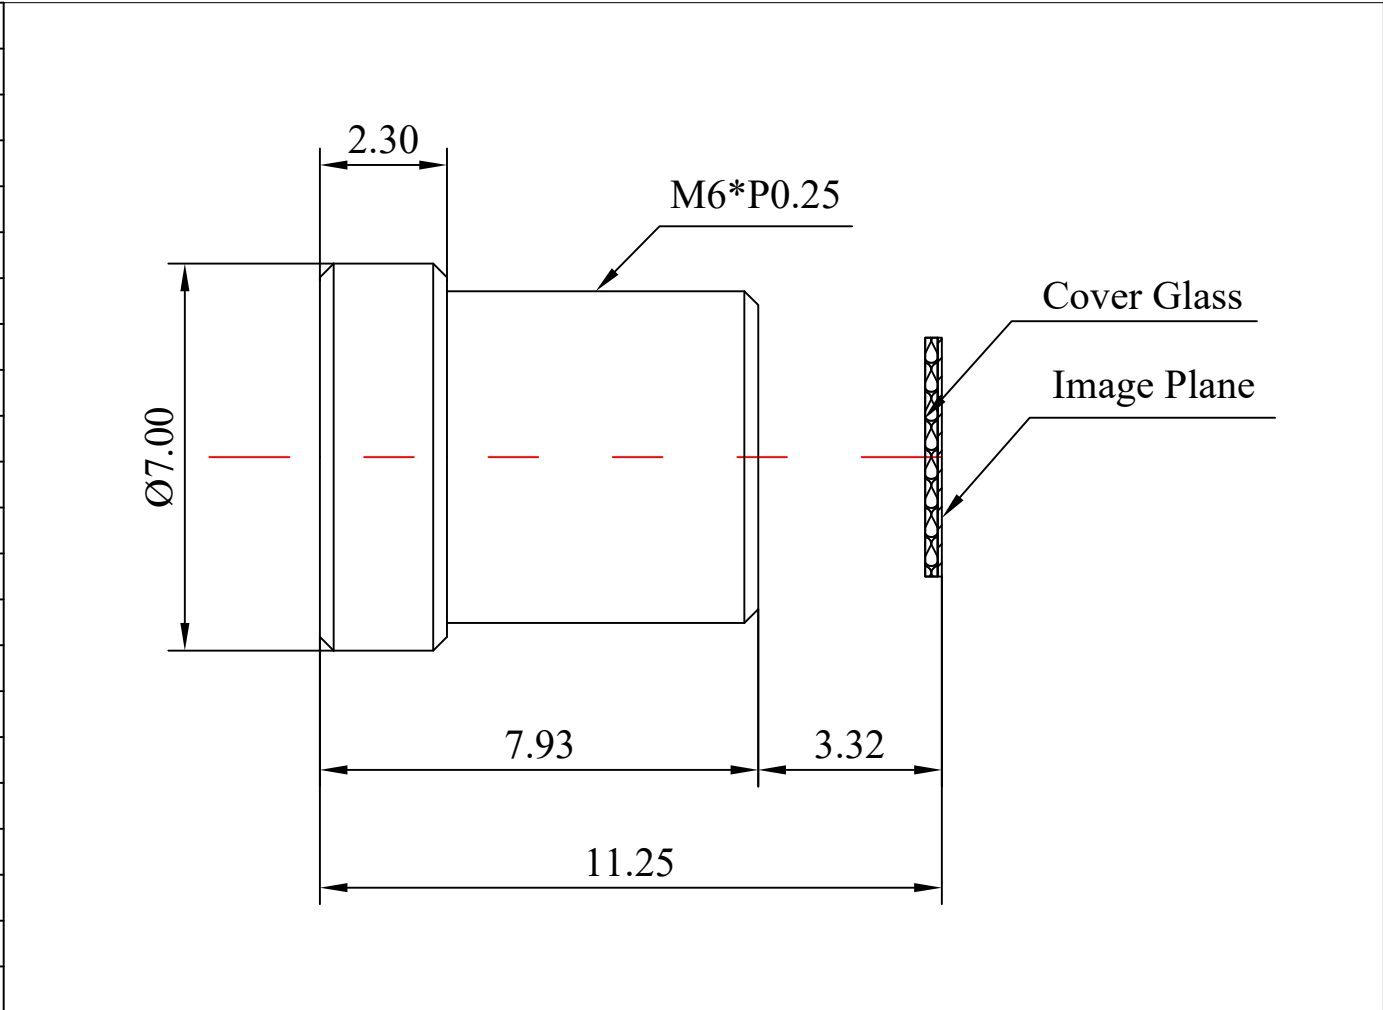


1	Type	M6 Lens	
2	Resolution	MP	
3	Image Format	1/4"	
4	Image Circle	φ5.0mm(MAX)	
5	EFL	6.7mm	
6	TTL	11.25mm	
7	F/NO.	F6.8	
8	FFL (M)	3.32mm	
9	BFL (O)	---mm	
10	For Sensor	1/4" SC132GS	
11	F.O.V	Horizontal	29°
12		Vertical	24.8°
13		Diagonal	37.4°
14	OPT Distortion	<0.1%	
15	Relative Ill.	>---%	
16	Chief Ray Angle	<10°	
17	M.O.D	0.1m~∞	
18	Mount Type	M6*P0.25	
19	Dimension Figure	φ7.0*L7.93mm	
20	Lens Structure	5G	
21	IR-Filter	IR650nm	
22	Waterproof	No	
23	Weight	---	
24	Iris Operation	Fixed	
25	Zoom Operation	Fixed	
26	Focus Operation	Manual	
27	Operating Temperature	-25° ~+85°	
28	Storage Temperature	-25° ~+85°	



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2024-10-22	CH8093AB Rev1.0		
Units	X.00	±0.10	Design	Linda	2024-05-03	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2024-05-08	
mm	Angle	±0.5°	Approval	Sanmu	2024-05-12	