
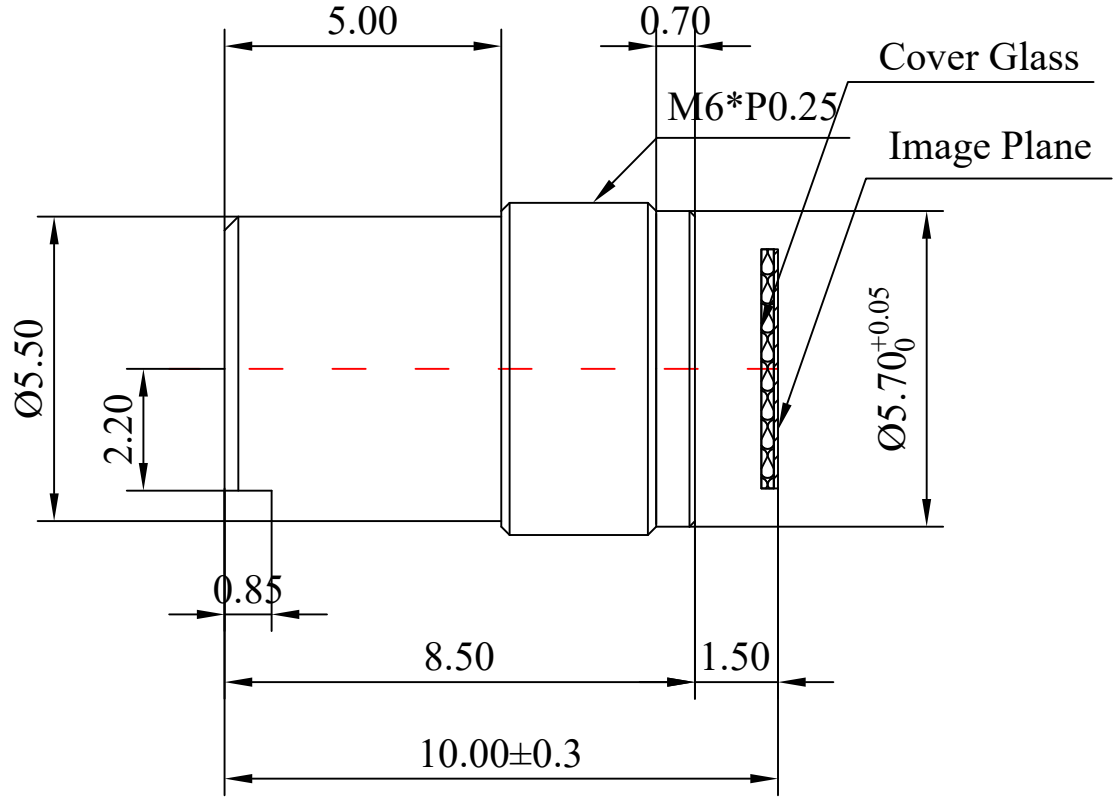


| | | | |
|----|-----------------------|--------------|-----|
| 1 | Type | M6 Lens | |
| 2 | Resolution | MP | |
| 3 | Image Format | 1/4" | |
| 4 | Image Circle | φ5.0mm(MAX) | |
| 5 | EFL | 4.0mm | |
| 6 | TTL | 10.0mm | |
| 7 | F/NO. | F6.8 | |
| 8 | FFL (M) | 1.5mm | |
| 9 | BFL (O) | ---mm | |
| 10 | For Sensor | 1/4" | |
| 11 | F.O.V | Horizontal | 40° |
| 12 | | Vertical | 25° |
| 13 | | Diagonal | 47° |
| 14 | OPT Distortion | <0.41% | |
| 15 | Relative Ill. | >---% | |
| 16 | Chief Ray Angle | <13.7° | |
| 17 | M.O.D | 0.1m~∞ | |
| 18 | Mount Type | M6*P0.25 | |
| 19 | Dimension Figure | φ6.0*L8.50mm | |
| 20 | Lens Structure | 5G | |
| 21 | IR-Filter | IR650nm | |
| 22 | Waterproof | No | |
| 23 | Weight | --- | |
| 24 | Iris Operation | Fixed | |
| 25 | Zoom Operation | Fixed | |
| 26 | Focus Operation | Manual | |
| 27 | Operating Temperature | -25° ~+85° | |
| 28 | Storage Temperature | -25° ~+85° | |



| Scale | Remark | Tolerances | Date | Revised | | 福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD |
|-------|--------|------------|------------|-----------------|------------|--|
| 4:1 | X | ±0.2 | 2024-10-22 | CH8093AB Rev1.0 | | |
| Units | X.00 | ±0.10 | Design | Linda | 2024-05-03 |  3D Angle Projection |
| | X.000 | ±0.001 | Checked | Anna | 2024-05-08 | |
| mm | Angle | ±0.5° | Approval | Sanmu | 2024-05-12 | |