
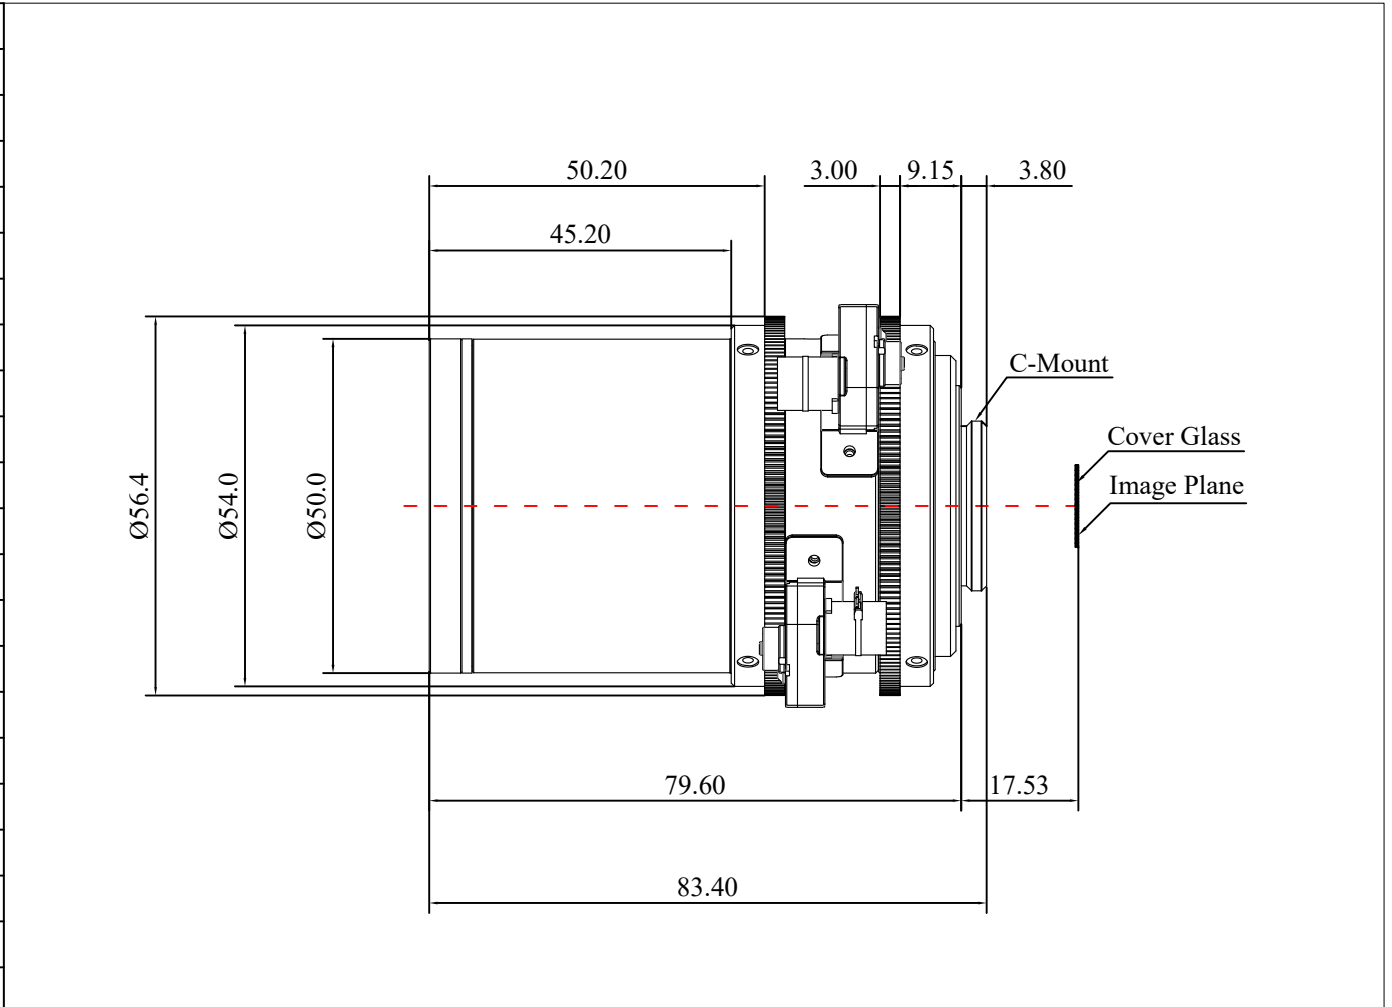


1	Type		Vari-Focal Lens		
2	Image Format		1/1.7"		
3	Image Circle		Ø9.5(Max)		
4	Optical EFL		3.6-18mm(In Air)		
5	Aperture		F1.4		
6	Resolution		12MP		
7	System TTL		103.44mm		
8	For Sensor	16:9	W-T	1/1.7"	1/1.8"
9	F.O.V	H		128°~30.5°	120°~29.2°
10		V		63°~17.1°	61°~16.4°
11		D		170°~35°	154°~33.6°
12	C.R.A		13.2°(W)~9.7°(T)		
13	Illumination		45%(W)~77.0%(T)		
14	Distortion		-75.67%(W)~-2.69%(T)		
15	Optical BFL		9.2(W)~20.42(T)		
16	Mechanical BFL		8.7(W)~19.92(T)		
17	Dimension Figure		Ø56.40*79.6mm		
18	Mount Type		C		
19	IR Correction		Yes		
20	Element		---		
21	Wavelength		430-650&850		
22	M.O.D		0.5m(W)~1.5m(T)		
23	Weight		---		
24	Iris Operation		P-Iris		
25	Zoom Operation		Motorized		
26	Focus Operation		Motorized		
27	Operating Temperature		-20° ~ +85°		
28	Storage Temperature		-20° ~+85°		



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4:1	X	±0.2	2024-05-15	CH936E Rev1.0		
Units	X.00	±0.10	Design	Linda	2023-09-26	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2023-10-20	
mm	Angle	±0.5°	Approval	Sanmu	2023-11-20	