
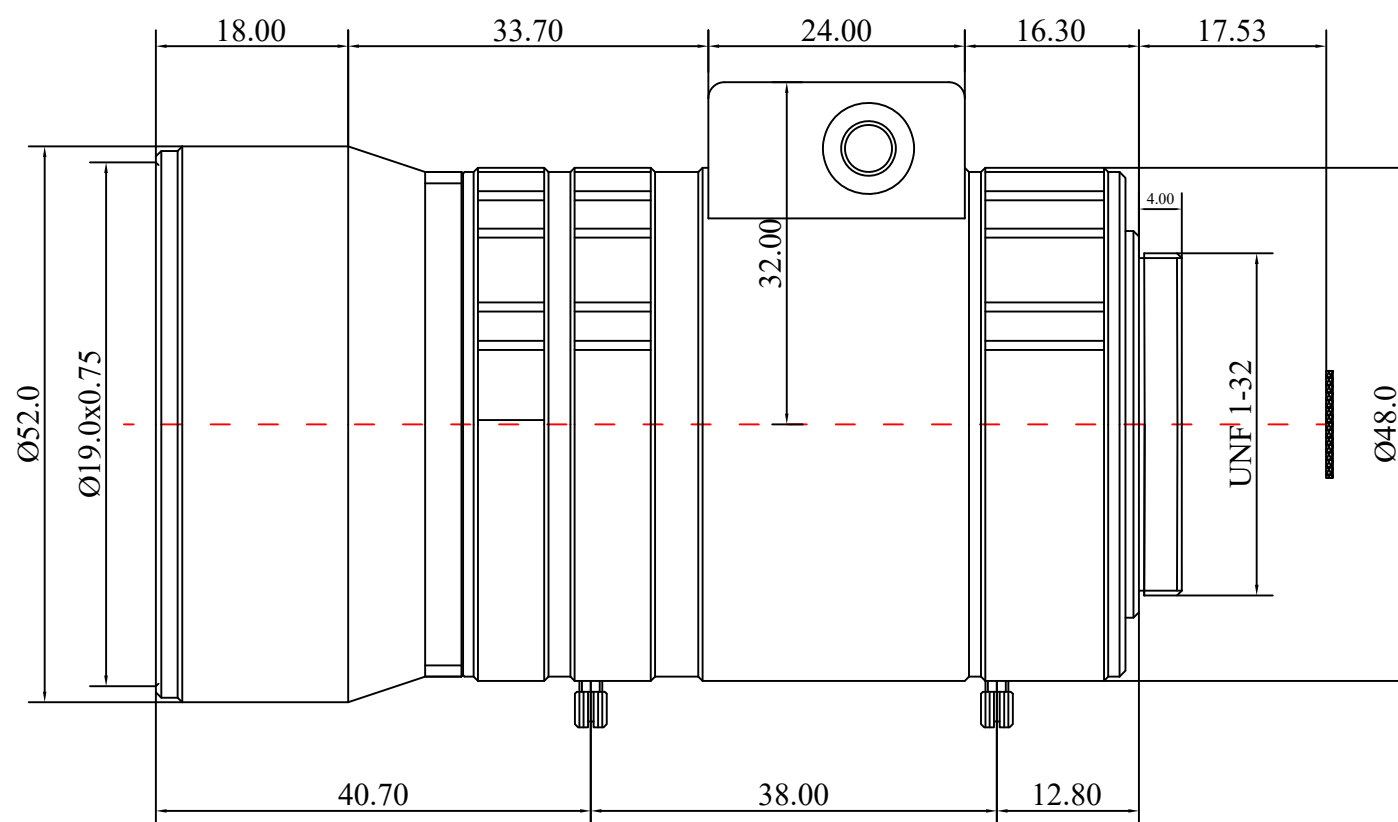


1	Type	Vari-focal Lens	
2	Resolution	MP	
3	Image Format	1/1.8"	
4	Image Circle	φ9.0mm(MAX)	
5	EFL	10-40mm	
6	TTL	109.03mm	
7	F/NO.	F1.4(ALL)	
8	FFL (M)	12.50mm	
9	BFL (O)	17.53mm	
10	For Sensor	1/1.8"	
11	F.O.V	Diagonal	48°-14°
12		Horizontal	38°-12°
13		Vertical	28°-8°
14	TV Distortion	-10.21%-0.17%	
15	Relative Ill.	>70%	
16	Chief Ray Angle	<12°	
17	M.O.D	0.3m~∞	
18	Mount Type	C/CS	
19	Dimension Figure	φ52.0*L92.0mm	
20	Lens Structure	14G All Glass	
21	IR-Filter	Non-IR	
22	Weight	300g	
23	Iris Operation	Auto	
24	Zoom Operation	Manual	
25	Focus Operation	Manual	
26	Operating Temperature	-20° ~+85°	
27	Storage Temperature	-20° ~+85°	



Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4: 1	X	± 0.2	2019-06-30	CH3583A Rev1.0		
	X.0	± 0.15				
Units	X.00	± 0.10	Design	Linda	2018-10-06	
	X.000	± 0.001	Checked	Anna	2018-11-25	
mm	Angle	± 0.5°	Approval	Sanmu	2018-12-28	


3D Angle Projection