
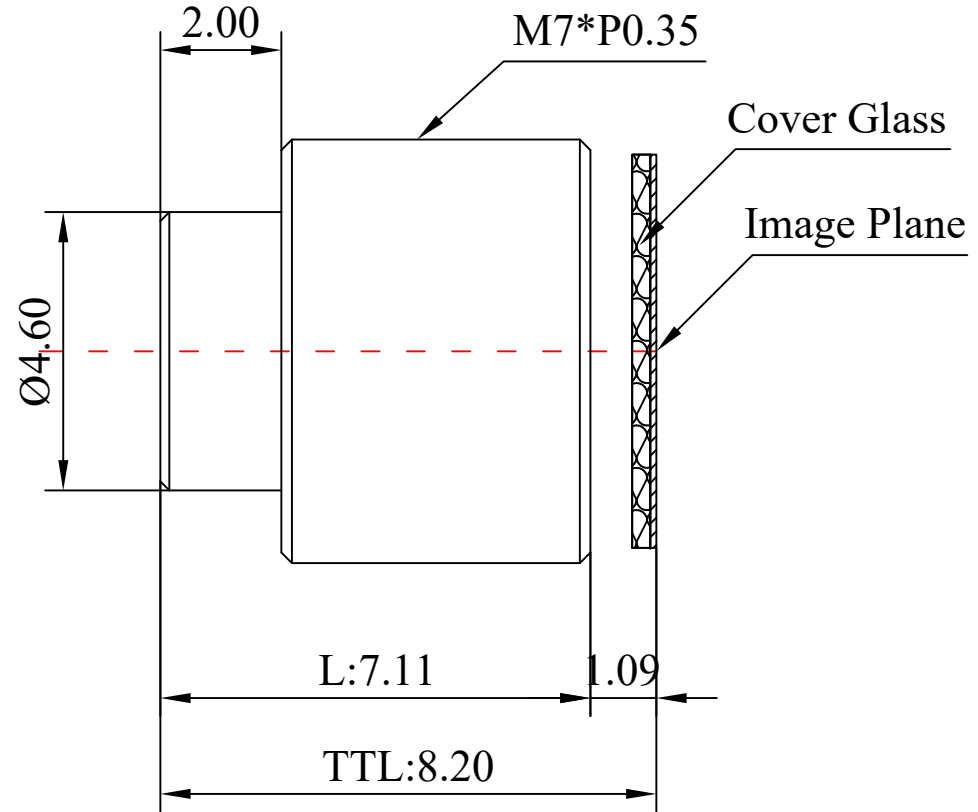


| | | | |
|----|-----------------------|--------------|------|
| 1 | Type | Board Lens | |
| 2 | Resolution | MP | |
| 3 | Image Format | 1/4" | |
| 4 | Image Circle | φ5.0mm(MAX) | |
| 5 | EFL | 2.9mm | |
| 6 | TTL | 8.2mm | |
| 7 | F/NO. | 2.0 | |
| 8 | FFL (M) | 1.09mm | |
| 9 | BFL (O) | 2.35mm | |
| 10 | For Sensor | 1/4" | |
| 11 | F.O.V | Horizontal | 85° |
| 12 | | Vertical | 50° |
| 13 | | Diagonal | 115° |
| 14 | TV Distortion | <-11.9% | |
| 15 | Relative Ill. | >60% | |
| 16 | Chief Ray Angle | <28° | |
| 17 | M.O.D | 0.1m~∞ | |
| 18 | Mount Type | M7*P0.35 | |
| 19 | Dimension Figure | φ7.0*L7.11mm | |
| 20 | Lens Structure | 4G | |
| 21 | IR-Filter | Non-IR | |
| 22 | Waterproof | No | |
| 23 | Weight | 2.0g | |
| 24 | Iris Operation | Fixed | |
| 25 | Zoom Operation | Fixed | |
| 26 | Focus Operation | Manual | |
| 27 | Operating Temperature | -20° ~+85° | |
| 28 | Storage Temperature | -20° ~+85° | |



| Scale | Remark | Tolerances | Date | Revised | | 福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD |
|-------|--------|------------|------------|----------------|------------|--|
| 8:1 | X | ±0.2 | 2019-07-16 | CH3601A Rev1.0 | | |
| Units | X.00 | ±0.10 | Design | Linda | 2017-05-26 |  3D Angle Projection |
| | X.000 | ±0.001 | Checked | Anna | 2017-07-21 | |
| mm | Angle | ±0.5° | Approval | Sanmu | 2017-07-27 | |