
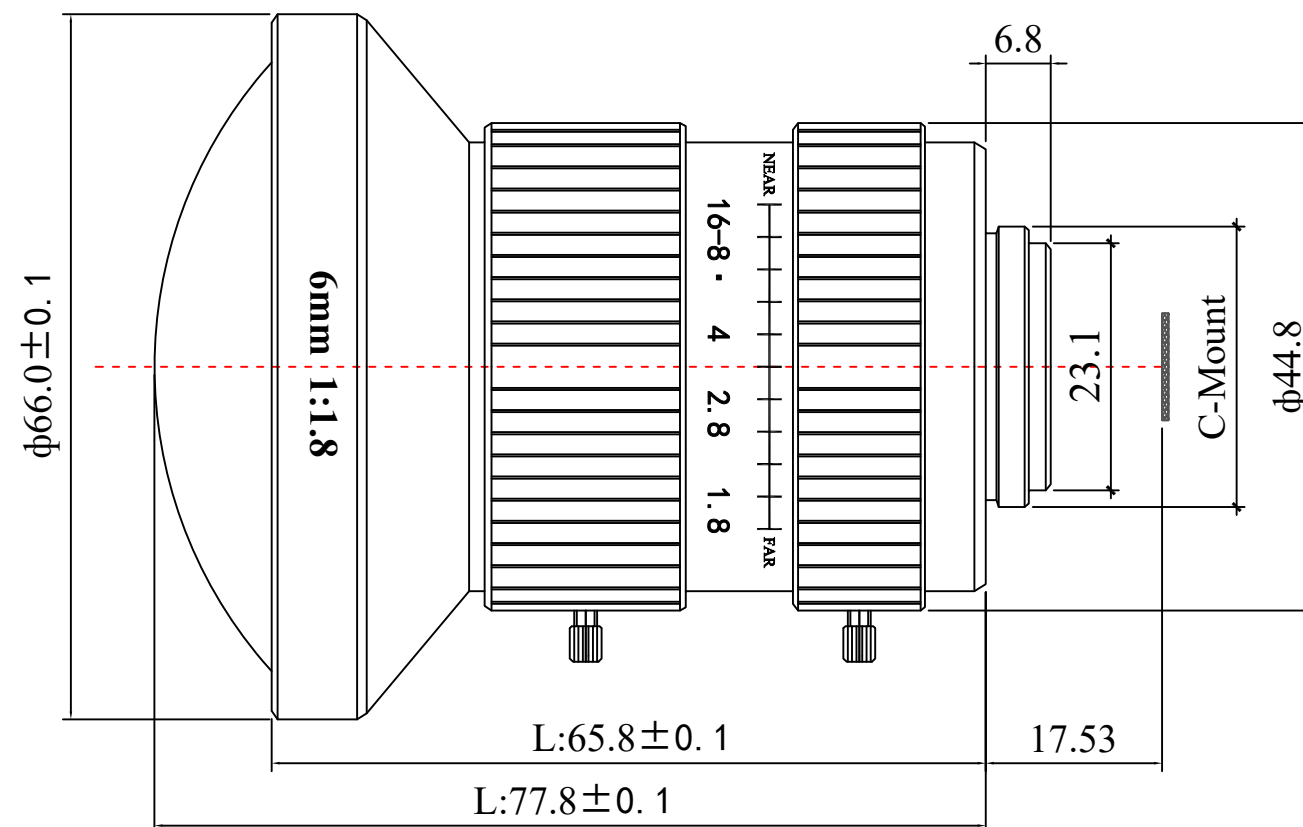


1	Type	Machine vision Lens	
2	EFL	6mm	
3	F.NO	F1.8~16	
4	Resolution	20MP	
5	Image Format	1.1"	
6	TTL	95.33mm	
7	BFL (O)	17.53mm	
8	F.O.V (H*V*D)	1.1"	104.9°*86.2°*118.2°
9		1"	95.4°*78.4°*107.5°
10		2/3"	73.3°*57.5°*86.6°
11	TV Distortion	<-2.5%	
12	M.O.D	0.1m	
13	Mount Type	C/CS	
14	Dimension Figure	φ66.00*L77.8mm	
15	Filter Size	Non	
16	Weight	350g	



17	Iris Operation	Manual	Scale	Remark	Tolerances	Date	Revised		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
18	Zoom Operation	Fixed		1.5 : 1	X	± 0.2	2021-01-15	CH600A Rev1.0	
19	Focus Operation	Manual	Units		X.0	± 0.15	Design	Linda	
20	Operating Temperature	-20° +85°		mm	X.000	± 0.001	Checked	Anna	2016-05-07
21	Storage Temperature	-20° +85°	Angle		± 0.5°	Approval	Sanmu	2016-05-28	 3D Angle Projection