
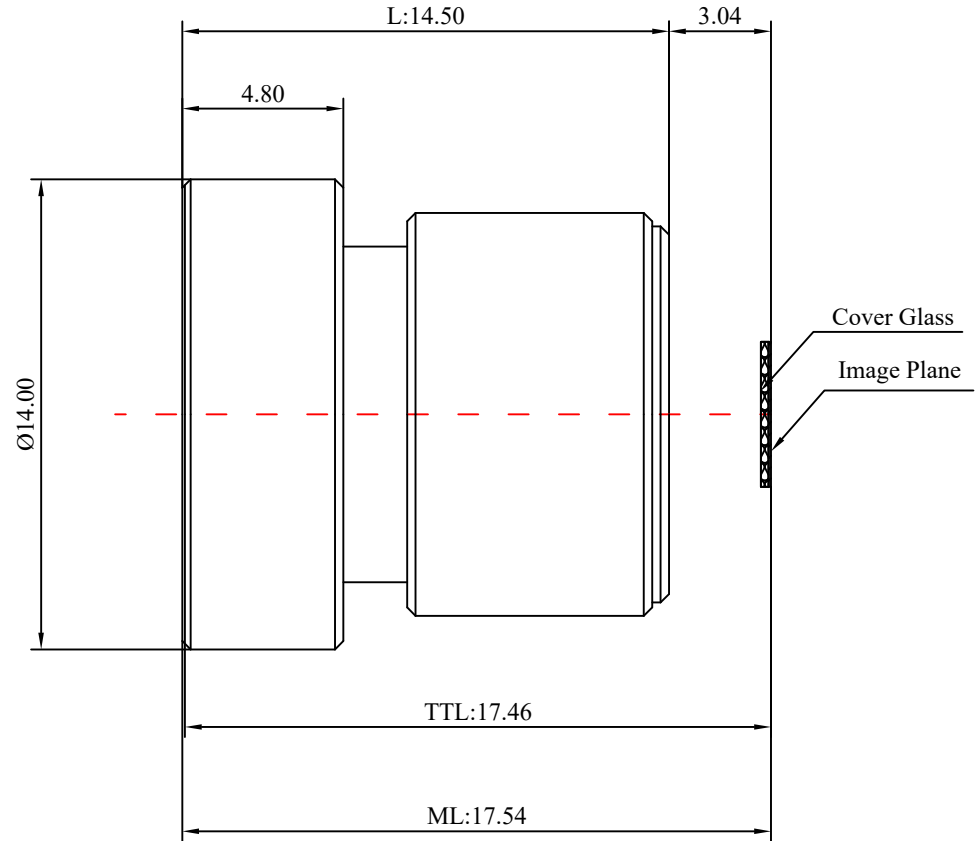


1	Type	Wide Angle Lens		
2	Resolution	8MP		
3	Image Format	1/2.8"		
4	Image Circle	φ6.8mm(MAX)		
5	EFL	5.0mm		
6	TTL	17.46mm		
7	F/NO.	F2.0		
8	FFL (M)	3.04mm		
9	BFL (O)	3.97mm		
10	For Sensor	IMX415	IMX675	
11	F.O.V	Horizontal	114°	105°
12		Vertical	61°	77°
13		Diagonal	133°	136°
14	OPT Distortion	<-55.8%		
15	Relative Ill.	>64%		
16	Chief Ray Angle	<15.7°		
17	M.O.D	0.1m~∞		
18	Mount Type	M12*P0.5		
19	Dimension Figure	φ14.0*L14.50mm		
20	Lens Structure	6G		
21	IR-Filter	Non-IR		
22	Waterproof	No		
23	Weight	/		
24	Iris Operation	Fixed		
25	Zoom Operation	Fixed		
26	Focus Operation	Manual		
27	Operating Temperature	-25° ~+85°		
28	Storage Temperature	-25° ~+85°		



Scale	Remark	Tolerances	Date	Revsied		福州创安光电科技有限公司 FUZHOU CHUANGAN OPTICS CO., LTD
4: 1	X	±0.2	2024/4/6	CH8106A Rev1.0		
Units	X.00	±0.10	Design	Linda	2024-03-03	 3D Angle Projection
	X.000	±0.001	Checked	Anna	2024-03-12	
mm	Angle	±0.05°	Approval	Sanmu	2024-04-03	